

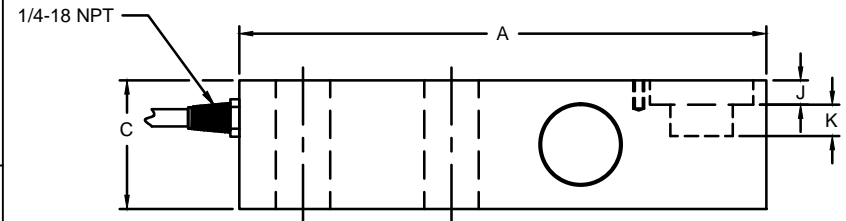


ZONE		REVISIONS			DATE			ECN			BY			CKD			APVD		
-	B	REDRAWN FOR LABELING CONSISTENCY			01/02/16			2016-73			TB			AB			AA		

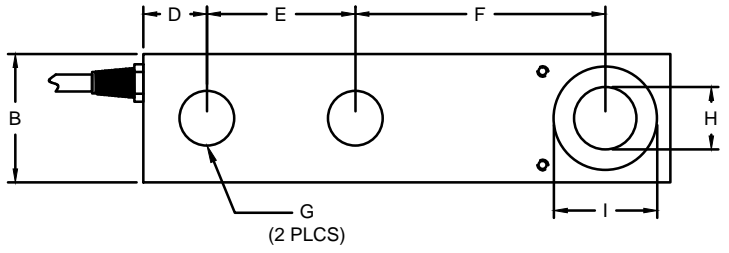

#653 SPACER PLATE

PERFORMANCE SPECIFICATIONS:

- CAPACITIES: 35K, 45K. (LB)
- RATED OUTPUT: 2.00 mV/V ±0.25%.
- SAFE OVERLOAD: 150% FS.
- EXCITATION VOLTAGE: 10V AC/DC (15V MAX).
- INPUT RESISTANCE: 2150 ±10Ω.
- OUTPUT RESISTANCE: 2000 ±5Ω.
- ZERO BALANCE: ±1.00% FS.
- SEAL TYPE: ENVIRONMENTALLY-SEAL IP67.
- NON-LINEARITY: ±0.03% FS.
- HYSTERESIS: ±0.03% FS.
- REPEATABILITY: ±0.01% FS.
- CREEP: ±0.02% FS IN 30 MINUTES.
- COMPENSATED TEMPERATURE RANGE: -10°C TO +40°C.
- TEMPERATURE EFFECT ON ZERO: ±0.0027% FS/°C.
- TEMPERATURE EFFECT ON OUTPUT: ±0.0015% FS/°C.
- INSULATION RESISTANCE: 5000 MEGOHMS.
- LOAD CELL CABLE: 4-22AWG, Ø6.8MM, BRAIDED, 50FT.
- LOAD CELL WIRING:
GRN (+EXC)
BLK (-EXC)
WHT (+SIG)
RED (-SIG)
BRAID/YELLOW: SHIELD
- FM APPROVED.

RATED CAPACITY	DIMENSIONS													
	A	B	C	D	E	F	G	H	I	J	K	L	M	N
35K - 45K	12.50	2.75	2.75	1.25	3.50	6.25	1.31	1.50	2.00	0.38	0.94	-	-	-
#653	-	-	-	-	-	-	-	-	-	-	-	0.50	6.00	2.75

DO NOT ALTER WITHOUT AGENCY NOTIFICATION

COTI GLOBAL SENSORS, INC.

CG - SMB6-2
LOAD CELL

APPROVALS		DATE		SCALE	SIZE	PART/DRAWING NO.	REV.
DRAWN:	RLU		06/16/15	NONE	B	DOD-CG-SMB6-2	B
CHECKED:	AA		06/16/15				
ENGINEER:	JSP		06/16/15				
APPROVED:	AA		06/16/15				
MATERIAL:	ALLOY STEEL						
FINISH:	NICKEL PLATED						
				MODEL	CG-SMB6-2		SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE REPRODUCED OR DISCLOSED FOR ANY PURPOSE OR USED TO PRODUCE THE ARTICLE OR SUBJECT WITHOUT WRITTEN PERMISSION FROM COTI GLOBAL SENSORS, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED
 .XX = ±0.02"
 .XXX = ±0.005"
 .XXXX = ±0.0002"
 FRACTIONS: ±1/16"
 ANGLES: DEC: ±1°