


REVISIONS							
ZONE	LTR.	DESCRIPTION	DATE	ECN	BY	CKD	APVD
-	-	INITIAL RELEASE	10/01/08	-	-	-	-
-	-	EDIT DIMENSION TABLE	9/08/09	-	-	-	-
-	C	REDRAWN FOR LABELING CONSISTENCY	10/20/15	2016-35	TB	AB	AA

**PERFORMANCE SPECIFICATIONS:**

1. CAPACITIES: 4.5KG, 7.5KG, 18KG, 35KG, & 50KG
2. RATED OUTPUT: 2.00 mV/V ±10%
3. SAFE OVERLOAD: 150% FS
4. EXCITATION VOLTAGE: 10-20V AC/DC
5. INPUT RESISTANCE: 385 ±10 OHMS
6. OUTPUT RESISTANCE: 350 ±3 OHMS
6. ZERO BALANCE: ±1.00% FS
7. SEAL TYPE: ENVIRONMENTALLY SEALED, IP67
8. NON-LINEARITY: ±0.03% FS
9. HYSTERESIS: ±0.02% FS
10. REPEATABILITY: ±0.02% FS
11. CREEP: ±0.03% FS
12. COMPENSATED TEMPERATURE RANGE: -10°C - +40°C
13. TEMPERATURE EFFECT ON ZERO: ±0.02%FS/°C
14. TEMPERATURE EFFECT ON OUTPUT: ±0.001%FS/°C
15. INSULATION RESISTANCE: >5000 MEGOHMS
16. LOAD CELL CABLE: 4 CONDUCTOR, 10 FT
17. LOAD CELL WIRING:  
 GREEN +EXC  
 BLACK -EXC  
 WHITE +SIG  
 RED -SIG  
 BRAID/YELLOW: SHIELD
18. FM APPROVED
19. MAX PLATFORM SIZE: 400 X 400 mm

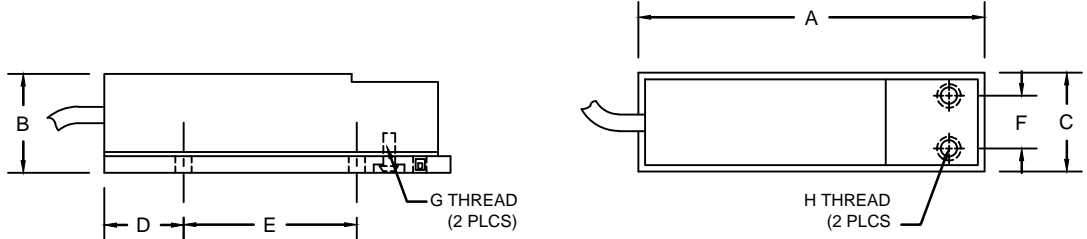

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	H
4.5-50KG	5.25	1.50	1.50	1.20	2.63	0.60	1/4-28UNF	1/4-20UNFx0.50dp

"DO NOT ALTER WITHOUT AGENCY NOTIFICATION"

COTI GLOBAL SENSORS, INC.

**CG-MK21 SINGLE POINT LOAD CELL**

	THIS DRAWING USES THIRD ANGLE PROJECTION	APPROVALS	DATE
	<small>THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE REPRODUCED OR DISCLOSED FOR ANY PURPOSE OR USED TO PRODUCE THE ARTICLE OR SUBJECT WITHOUT WRITTEN PERMISSION FROM COTI GLOBAL SENSORS, INC.</small>	DRAWN: DH	9/08/09
		CHECKED: MB	9/08/09
		ENGINEER: DH	9/08/09
		APPROVED: AA	9/08/09
<small>TOLERANCES UNLESS OTHERWISE SPECIFIED        .XX±.01        .XXX±.005        FRACTIONS±1/16"        ANGLES: ±1/2°</small>		MATERIAL STAINLESS STEEL	

SCALE	SIZE	PART/DRAWING NO.	REV.
NONE	B	DOD-CG-MK21	C
MODEL CG-MK21		SHEET 1 OF 1	